



THE FLAG COMPANY, INC.


Flagpole Installation Page

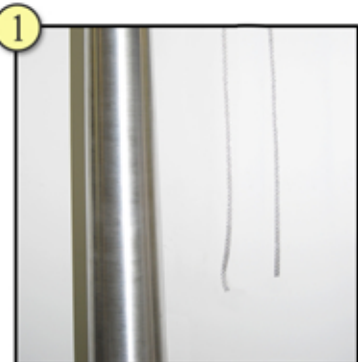


When your flagpole is standing, bring your knot to the bottom of the pole, untie, and let the halyard hang freely to untwist.

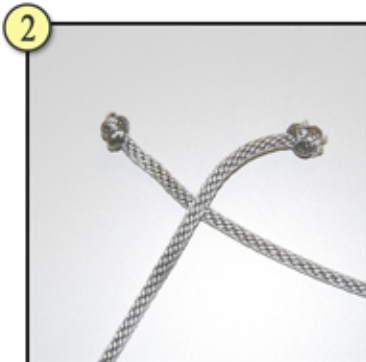

Once your halyard is untwisted, tie single knots on both ends.

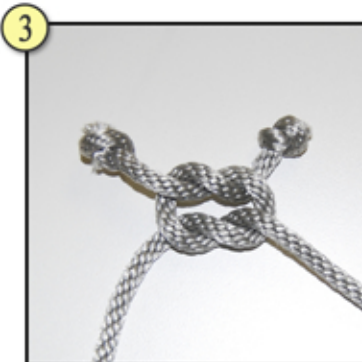


Tie a square knot with the two knotted ends.

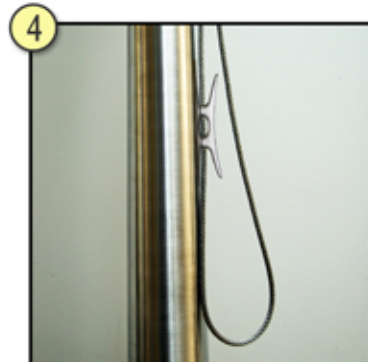

Your halyard loop should be approximately 2 feet below cleat.



Make sure your knot is on the outside of the truck.

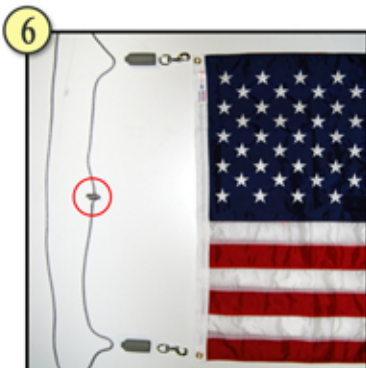


Position snaps so that the knot is midpoint on the flag.




Pull halyard through 1st snap cover.




Attach 1st snap to halyard. Slide 1st snap cover over the 1st snap.

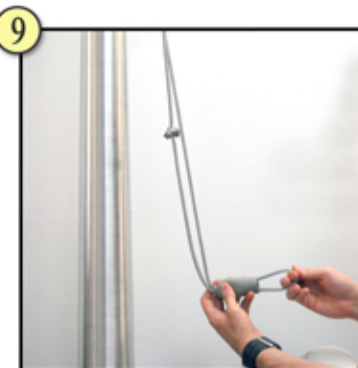


Pull halyard through 2nd snap cover.

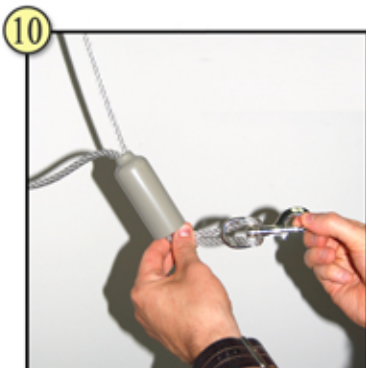

Attach 2nd snap to halyard. Slide 2nd snap cover over the 2nd snap.

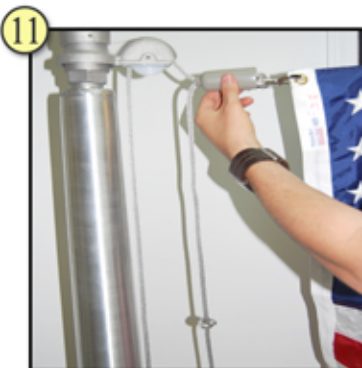


Attach top of flag to the 1st snap. Here your knot should be about midway between the flag.

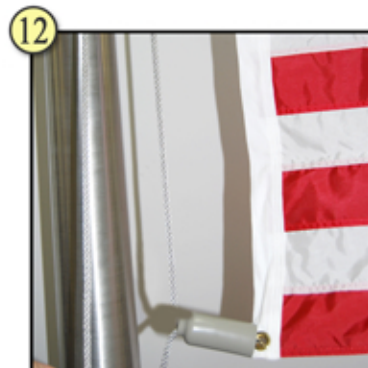


Attach bottom of flag to the 2nd snap.



Now your 1st snap cover should be pointing down.

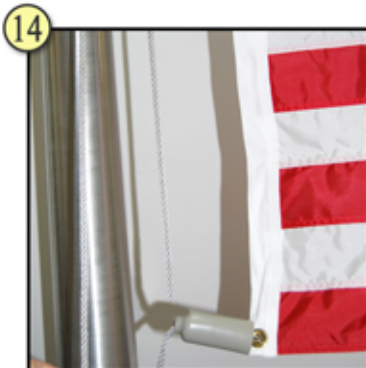

Your 2nd snap cover should be horizontal.

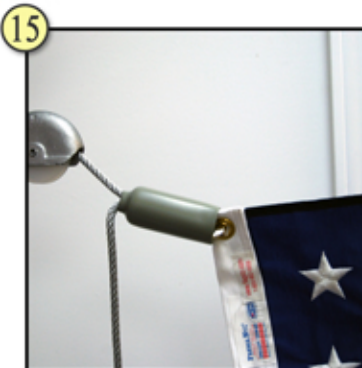

Raise flag all the way to the top of the flagpole and then lower about 2 inches.